

FEATURES  
GUIDE

ZENITH  
COLLECTION





# DATA SHEET ZENITH COLLECTION

Pelle bovina di origine asiatica, smerigliata e stampata.  
 Spessore 0,8 – 1,0 mm. Superficie media 3,8 – 4,0 m<sup>2</sup>.  
 La rifinitura è all'acqua con resine e pigmenti, mano morbida, tatto setoso e aspetto opaco.

Bovine of Asian origin, corrected and embossed.  
 Thickness 0.8 – 1.0 mm. Average size of each hide is around 3.8 – 4.0 sqm.  
 Finished using water based system. This product has a pigmented and protective top coat, and a soft handle with silky matt finish.

Asiatisches Rindsleder, geprägt.  
 Stärke 0,8 – 1,0 mm. Durchschnittliche Hautgröße ca. 3,8 – 4,0 qm.  
 Leder mit weichem Griff und seidenmatter Optik. Veredelung auf Wasserbasis.

Bovine originaire de l'Asie, rectifié ou corrigé et grains imprimés.  
 Epaisseur: 0,8 – 1,0 mm. Superficie moyenne: 3,8 – 4,0 m<sup>2</sup>.  
 Pigmentation à l'eau avec application d'une résine que donne un touché très souple et ciré. Aspect: opaque.

| Analisi<br>Test<br>Analysen<br>Essai   | Metodo di prova<br>Test Method<br>Prüfverfahren<br>Test Méthode | Unità di misura<br>Measurement Unit<br>Maßeinheit<br>Unité de Mesure | Garantito<br>Guaranteed<br>Garantiert<br>Assuré                  |
|--|---|--|--|
| Resistenza allo Strappo Pantalone<br>Tear strength - Single edge tear<br>Reißfestigkeit Hose<br>Résistance au déchirement  | UNI EN ISO 3377-1   | N  | > = 20   |
| Solidità del colore allo strofinio - Secco 500 Cicli<br>Colour fastness to rubbing - Dry 500 Cycles<br>Abriebfestigkeit - Trocken 500 Zyklen<br>Résistance aux frottements - A sec 500 Cycles  | UNI EN ISO 11640:1998   | Scala dei Grigi<br>Grey Scale<br>Grauskala<br>Échelle de gris        | > = 4  |
| Solidità del colore allo strofinio - Umido 250 Cicli<br>Colour fastness to rubbing - Wet 250 Cycles<br>Abriebfestigkeit - Nass 250 Zyklen<br>Résistance aux frottements - Humide 250 Cycles  | UNI EN ISO 11640:1998   | Scala dei Grigi<br>Grey Scale<br>Grauskala<br>Échelle de gris        | > = 4  |
| Solidità del colore allo strofinio - Sudore 80 Cicli<br>Colour fastness to rubbing - Sweat 80 Cycles<br>Abriebfestigkeit - Schweiß 80 Zyklen<br>Résistance aux frottements - Sueur 80 Cycles   | UNI EN ISO 11640:1998<br>ISO 11641 pH8                          | Scala dei Grigi<br>Grey Scale<br>Grauskala<br>Échelle de gris        | > = 4  |
| Resistenza alle flessioni - Secco 50.000 Cicli<br>Flexing endurance - Dry 50.000 Cycles<br>Biegefestigkeit - Trocken 50.000 Zyklen<br>Résistance à la flexion - A sec 50.000 Cycles  | UNI EN ISO 5402   |  | Nessun danno<br>No damage<br>Keine Beschädigung<br>Aucun dommage |
| Adesione della rifinitura - A secco<br>Finish Adhesion - Dry<br>Haftung der Oberflächenbehandlung - Trocken<br>Adhésion du film - A sec  | UNI EN ISO 11644  | N/cm   | > = 2  |
| Solidità del colore alla luce artificiale - Energia di esposizione 16.000 kj/m <sup>2</sup><br>Colour fastness to artificial light - Exposition energy 16.000 kj/sqm.<br>UV-Beständigkeit - Expositions energie 16.000 kj/qm.<br>Résistance à la lumière - Énergie d'exposition 16.000 kj/m <sup>2</sup> | UNI EN ISO 105 B02 (MET. 5)                                     | Scala dei Blu<br>Blue Scale<br>Blauskala<br>Échelle des bleus        | > = 5  |
| Resistenza alla sigaretta e alla piccola fiamma<br>Burning behaviour to cigarette and match flame<br>Brandverhalten ggü. Zigarettenglut und Streichholzflamme<br>Comportement de combustion cigarettes et allumettes   | BS 5852:1979<br><br>BS EN 1021-1-2:2006                         |  | Passa<br>Pass<br>Bestanden<br>Passe                              |



# LEATHER CARE INSTRUCTIONS CLASSIC COLLECTION

## **Protect against excessive sunlight, dryness and heat:**

Sunlight will fade and dry out the leather.

Dryness will cause the leather to crack.

Heat will dry out the leather and cause further damage.

## **How to remove spots and stains:**

Blot excess liquid up as quickly as possible with a clean microfibre cloth.

If necessary, use clean lukewarm water only and let dry naturally. Do not dry with hair dryer, etc.

If water is used, clean the entire area where spot occurred seat cushion, arm, etc.

## **DO NOT RUB.**

## **How to remove butter, oil or grease:**

Wipe excess butter, oil or grease off the leather with a clean microfibre cloth. Then leave it alone as the spot should dissipate as much as possible into the leather in a short period of time.

**Do not apply** water or try to wash the butter, oil or grease spot.

## **How to remove chewing gum:**

Place ice cubes in a plastic bag and apply on the chewing gum. Wait several minutes, lift the ice bag and remove the chewing gum.

## **General Care**

**DO NOT USE CHEMICALS, SADDLE SOAP, CLEANING SOLVENTS, FURNITURE POLISH, OILS, VARNISH, ABRASIVE CLEANERS, SOAP OR AMMONIA WATER.**


**For further informations, contact AMS.**

These are recommended or suggested methods of cleaning. The manufacturer is not responsible for damage incurred while cleaning. Always try the cleaning method in a hidden area first to see results.



## PRODUCT FEATURES AND IMPERFECTIONS THAT MAY OCCUR


### REGULAR GRAIN

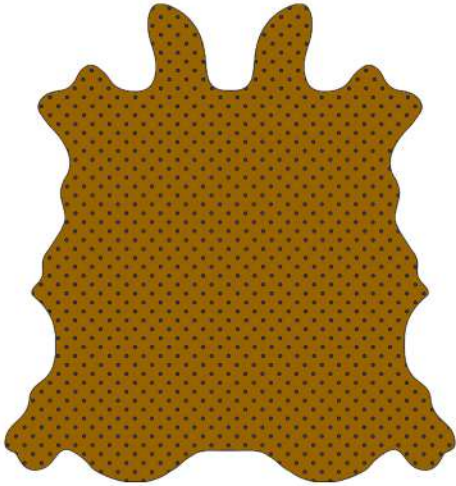

Bovine of european origin, corrected and embossed for enhanced grain consistency.



### MEASURES

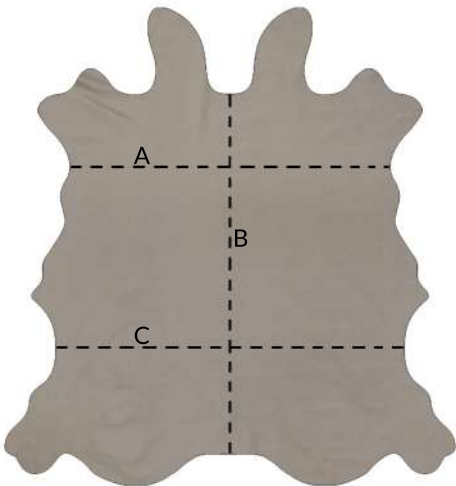

The average size of a hide in Zenith collection is 4.00 M2.

A - 1.50 MT (+-)

B - 1.90 MT (+-)

C - 1.70 MT (+-)

Note: Although every effort is made to ensure that the leather ordered match the colours from our catalogues, slight variations may occur from batch. We advise to always make an sample request from the colour you may need.